


## OKOV ZA GRAĐEVINSKU STOLARIJU

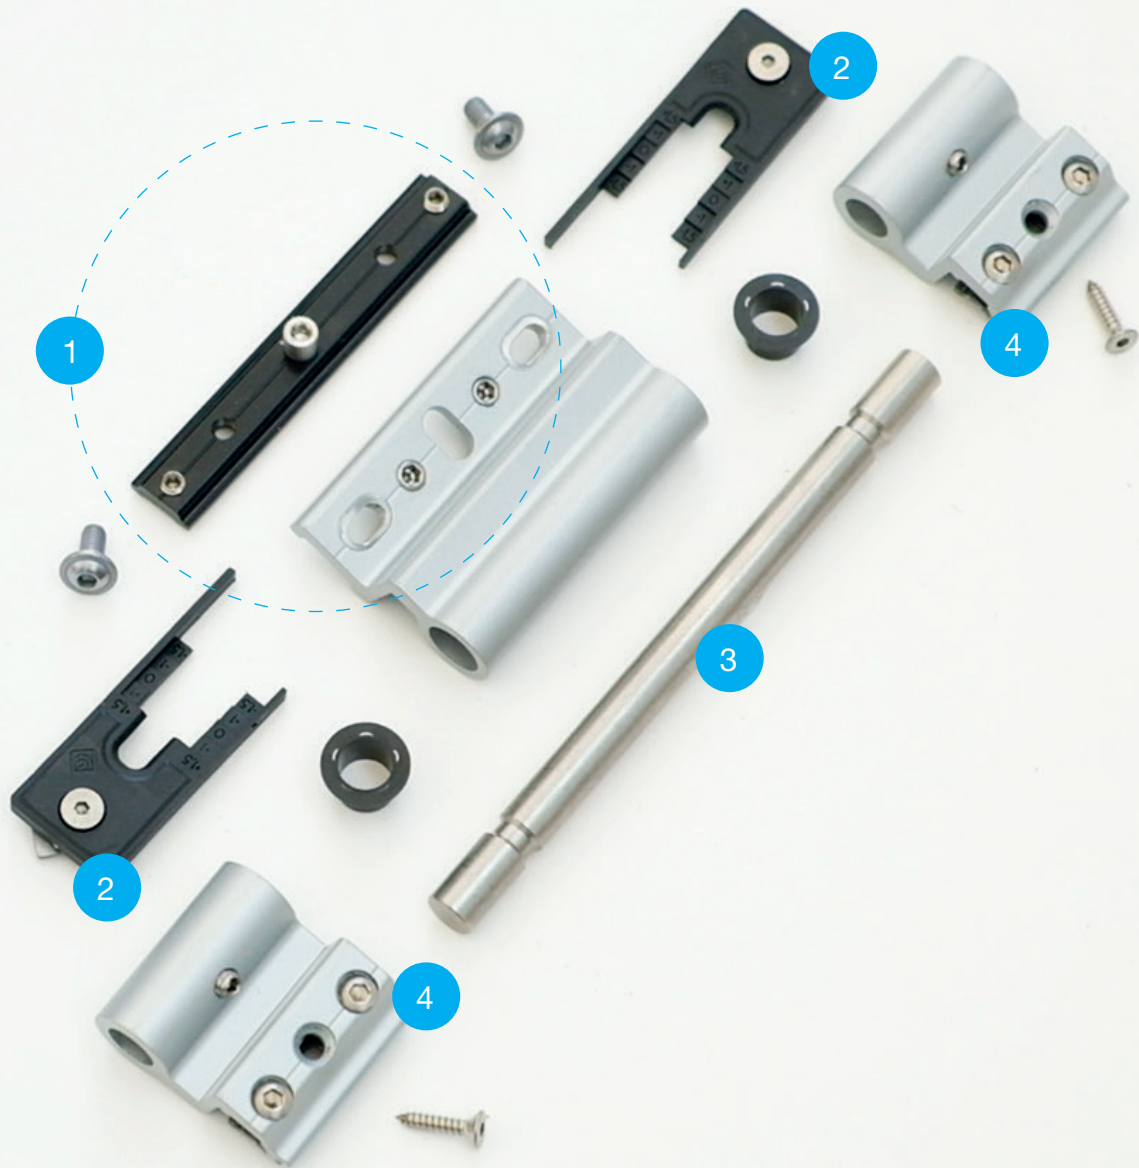

1

Sistema di regolazione unico lato anta:  
Altezza +4 mm  
Fuga ±1,5 mm  
Pressione +1 mm

Unique adjustment system sash side:  
Vertical - Height +4 mm  
Horizontal ±1,5 mm  
Pression +1 mm

Einzigartiges Verstellsystem flügelseitig:  
Vertikal - Höhe +4 mm  
Horizontal ±1,5 mm  
Druck +1 mm

Jedinstveno podešavanje bočne strane krila:  
Vertikalno - Visina +4 mm  
Horizontalno ±1,5 mm  
Pritisak +1 mm

2

Spessori guida per regolazione in fuga

Emplate thickness for lateral adjustment

Schablonenkeil für horizontalen Anpassung

Šablona za horizontalno podešavanje

3

Perno in acciaio Inox Ø 12 mm

Stainless steel pin Ø 12 mm

Edelstahl Stift Ø 12 mm

Trn od nehrđajućeg čelika Ø 12 mm

4

Piastrine ad aggancio rapido lato telaio

Frame side fast mounting plate

Rahmenseitige Schnellmontageplatte

Ploča za brzu montažu sa strane okvira