


TECHNICAL DATA SHEET

Eurovent **ROLL STANDARD**

Ridge sealing and ventilation tape

Ridge tape made of profiled aluminum sheet, technical fabric and self-adhesive butyl tape. Applied as sealing and ventilating element. Protects the roof covering against moisture and dust while ensuring proper ventilation.

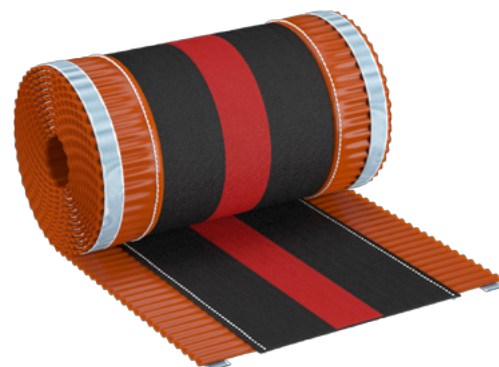

Parameter	Value
Components	Aluminum sheet, technical fabric, butyl tape
Roll's width	180 mm 240 mm 310 mm
Roll's length	5 mb
Aluminum sheet	Width: 50 mm, 70 mm Thickness: 0,12 mm
Technical fabric	Width: 120 mm, 180 mm, 200 mm, Thickness: 0,8 mm (EN 9863-1) Mass/Unit Area: 220 gr/m ² (EN 9864) Elongation: 55/12 kN/m (EN 10319) Air permeability: 742 mm/s (EN ISO 9237:1995) Water permeability: 200 m/sec*10 ⁻³ (EN ISO 11058) Weathering resistance: 90% retained strength (EN 12224)
Butyl tape	15 mm x 1,5 mm, black
Packaging	4 rolls in a box 180 mm - 192 rolls/pallet 240 mm, 310 mm - 144 rolls/pallet
Storage	In closed and intact packages, in dry areas

Przywory, 20.07.2015