
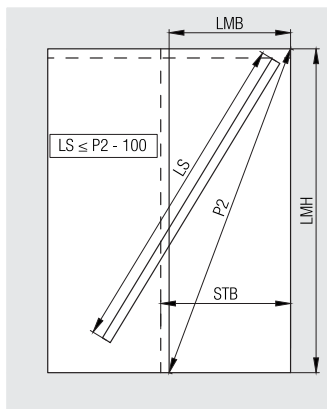


HAWA-Junior 120/GP-Pocket

- za staklena vrata
- rješenje za niše (zidne džepove) - vodilica se jednostavno montira ili demontira
- pricvršćenje stakla u točkama s ovjesom za minimalnu visinu ugradnje
- podešavanje visine kod gotovih montiranih vrata
- gornje vođenje s nadgradnom vodilicom ili vodilicom u ravni sa stropom
- stropna montaža


Tehnički podaci

maks. težina vrata:	120 kg
maks. visina vrata:	4000 mm
maks. širina vrata:	1500 mm
Debljina stakla:	8 - 12,7 mm
Podešavanje visine:	+ / - 3 mm

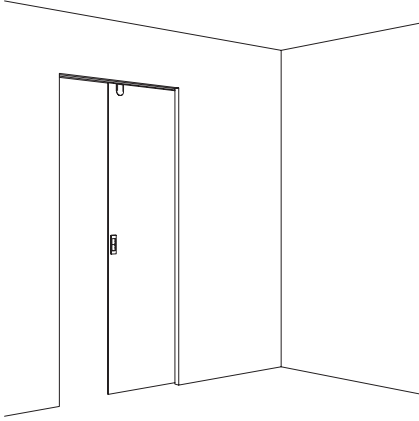






Izračunavanje duljine vodilice
Duljina vodilice mora biti min. 100 mm kraća od svjetle mjere slobodne dijagonale (P2).

LMB = svjetla širina
LMH = svjetla visina
STB = širina kliznih vrata
P2 = slobodna dijagonala
LS = vodilica

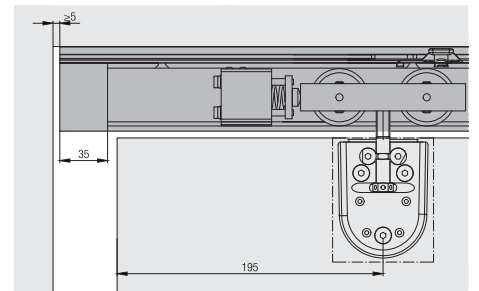

Opružni odbojnik

Za postavljanje vrata bez vidljivih dijelova okova na rubu vrata, integriran u vodilici, s funkcijom Push-To-Open.

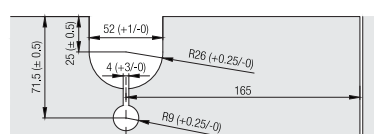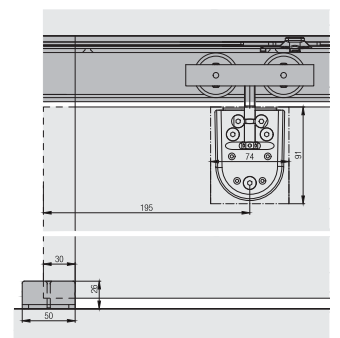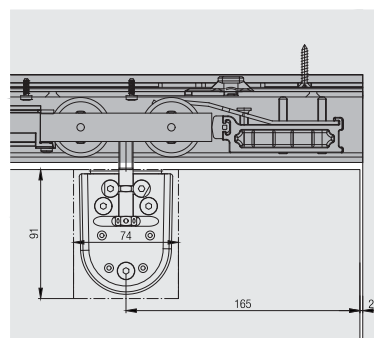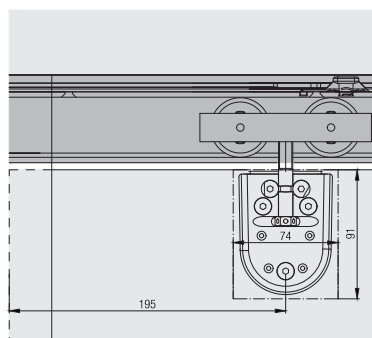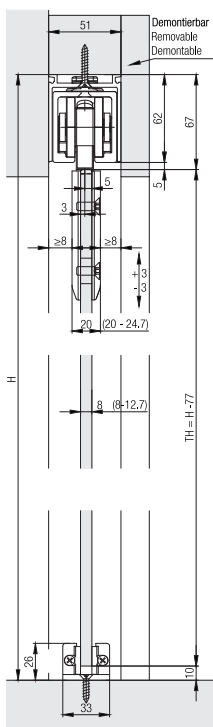

Detalj motaže vrata sa stražnje strane:

Primjer ugradnje podne vodilice i stražnjeg ovjesa