







Ookov za 2 drvena vrata s klizanjem do 15 kg, s vodilicom za pričvršćivanje vijcima, za ljepljenje ili za utor.


Dizajn kombinirana fronta - Mixslide.

Prednosti


-  **Fleksibilnost** Fleksibilna racionalna montaža s jednostrukom ili dvostrukom vodilicom za pričvršćivanje vijcima, za ljepljenje ili s okretnim zasunom
-  **Estetika** Bez utora u podu i bez vidljive vodilice

Tehnički podaci

- | | | | |
|--|-------|----------|--|
|  | maks. | 15 kg | E - dvostr. vodilica za prič. vijcima u utor |
|  | maks. | 1400 mm | B - vodilica s okretnim zasunom |
|  | maks. | 1000 mm | C - vodilica za pričvrš. vijcima u utor |
|  | | 16–19 mm | D - vodilica za pričvršćivanje vijcima |

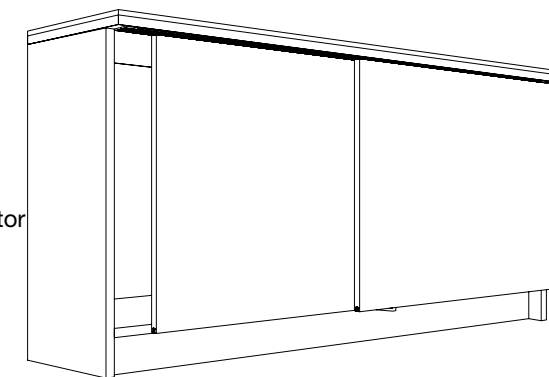

Primjeri ugradnje

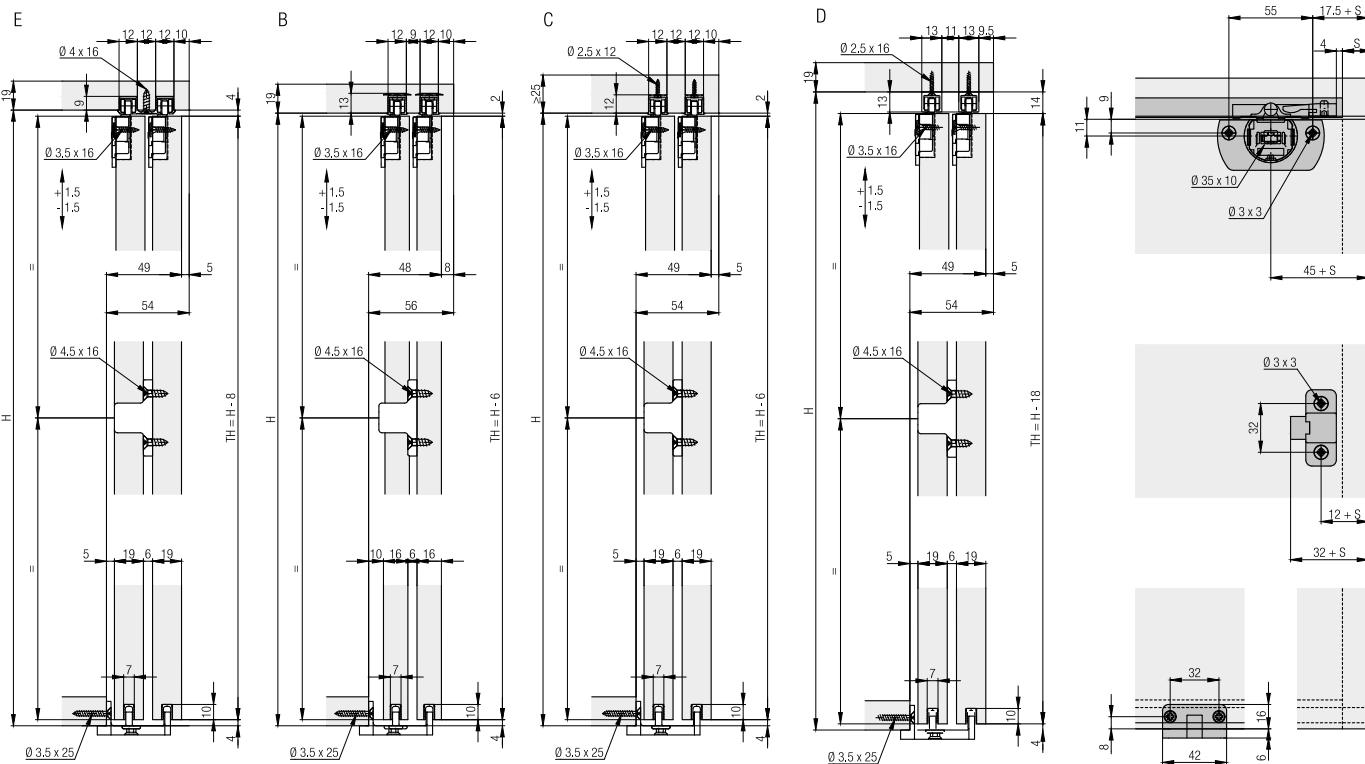

TH = visina vrata