

Yellow (flashing): The anti collision function has activated during a raise operation.
Red (flashing): The anti pinch function has activated during a lowering operation.

3.Anti pinch function: If the unit is obstructed during a closing operation, the anti pinch function will reverse the direction of travel momentarily, and then pause all movement. The operation LED will flash red to indicate that the anti pinch function has been activated. When the button at the top of the unit is pressed again, the unit will fully raise and return to normal operation.

4.Anti-collision function: If the unit encounters an obstruction during a raise operation, the anti collision function will activate and the unit will pause. To indicate that the anti obstruction function has activated, the indicator LED will flash yellow. Once the obstruction has been cleared, the unit can be returned to normal operation by pressing the button on the top of the unit once again.

5.One key design: This item has been designed with simplicity and ease of use in mind. For this reason, all operations are controlled using a single button on the top of the unit.

6.Water resistant design: In a closed state, this product is designed to prevent water ingress by preventing spillages from entering the product body and potentially leaking into the mains sockets.

7.USB charging: This unit is equipped with 2x USB charge sockets. This allows portable devices to be charged from the convenience of your worktop.

8.Bluetooth speakers(optional): ① Bluetooth function: Firstly turn "knob volume switch" on the panel, RGB color light flashing fast red, when Bluetooth function is turned on, RGB color light flashing red and green alternatively. For the first time to match equipment (Bluetooth distance not to exceed 30 meters), turn on the Bluetooth settings on your phone, tablet, computer or other device, and connect to the "BK8000L" (ID number), when connected, the speaker will sound a Beep, and RGB color light flashing red slowly. To dis-connect, turn off the "knob volume switch" till the indicator light is off, or disconnect the Bluetooth connection, the speaker will sound a beep, and RGB color light will flash red and green alternatively. ②Aux connection: with a standard 3.5mm jack, it is available to connect computer, phone or other devices with a specialized cable, after connected, RGB color light will be green. (Remark: a. Bluetooth speaker function is only available for series products with Bluetooth speaker module b. Does not support functions for headphones or microphones)

TECHNICAL PARAMETERS


Rated voltage range: AC95V-250V
Rated frequency: 50HZ /60HZ

Rated current:16A
Hole cut-out diameter:φ95mm
USB supply current:2.1A


USAGESUGGESTIONS

Kitchen Worktops
Office Desks
Hotel Dressing Tables
Caravans
Canal Boats
Reception Desks

Thank you for using this worktop solution



Product drawing and size

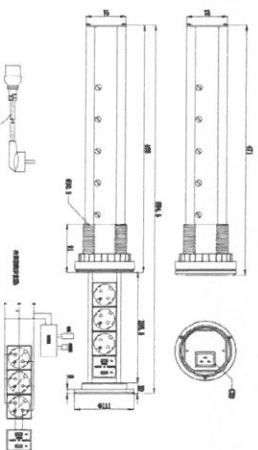

Fall in position: 75*75*471mm in length.

Rise in place size: 75*75*694.5mm.

INTRODUCTION

Thank you for purchasing a motorized pop-up socket. We hope that our product will provide you with convenience for years to come.

UNPACKING


Remove contents from the package and lay out on cardboard or other protective surface to avoid damage. Check the contents are correct and free from damage before proceeding. If any parts are missing or damaged, please call our support line for immediate assistance.

SAFETYINFORMATION

Install and use this product with care. Please read this instruction booklet thoroughly before installation and carefully follow all instructions. Do not use this product for any purpose or in any configuration not explicitly specified in this instruction manual. We hereby disclaim any and all liability for injury or damage arising from incorrect assembly, mounting or usage of this product.

CAUTION

This motorised pop-up socket must be securely installed on a solid horizontal surface.



INSTALLATIONDIAGRAM

- (1) Productbody (2)Silicone pad (3)Worktop (4)Locking Ring

INSTALLATIONINSTRUCTIONS

1. Use a suitable hole cutter to make a 95mm hole in the worktop(3).
2. Fix the Silicone pad(2) onto the Product body(1).
3. Insert the product body (1) into the 95mm hole in theworktop(3).
4. Rotate the Locking Ring onto the product till the top tightly.

Congratulations, you have successfully installed your new motorizedpop-up sockets.

KEYFEATURES

1. Accidental Operation Protection: This product is fitted with an automatic delay timer to prevent accidental operation. Press the button on the top of the unit for 2 seconds to enable the motorized raise/lower function. This function works to protect both children and animals.

2. Light design:

Dim Green (static): The unit is in a lowered position and is ready to be used.

Bright Blue (flashing): A raise operation is currently in progress.

Dim Blue (flashing): The unit has been paused during a raise operation.

Dim Blue (static): The unit is fully raised and ready for use.

Bright Green (flashing): A lowering operation is currently in progress.

Dim Green (flashing): The unit has been paused during a lowering operation.