




Potreban prostor u korpusu

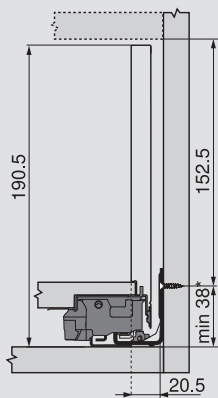

Ugr. dim. stražnje stranice

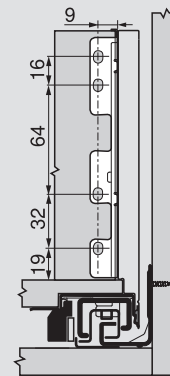

Dimenzije krojenja za staklo



Prema normi DIN EN 14749 (izdanje studeni 2005.) u kombinaciji sa sustavom LEGRABOX nije propisano sigurnosno staklo.

Obrada rubova izvedena je kao polirani ravni rub sa skošenim bridom od 1 mm \pm 0.5 mm.

$X = LW - 80$ mm

*Y = niski uložni element: 70 mm

*Y = visoki uložni element: 138 mm

Položaj vijka vodilica koje se pričvršćuju na korpus – 40 kg


Nazivna duljina NL (mm)

270


300, 350

400 – 500


550, 600

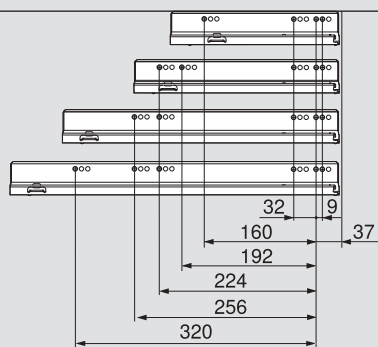


Dimenzije za krojenje iverice debljine 16 mm




KB širina korpusa
LW svijetla širina korpusa
NL nazivna duljina



Stražnja stranica
148 mm



Dno
Drvena stražnja stranica
NL - 10 mm
Metalna stražnja stranica
NL - 21 mm



dimenzije utora

* + 1 mm za montažu vodilice koja se pričvršćuje na korpus na položenoj stranici korpusa