
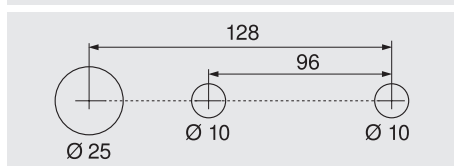
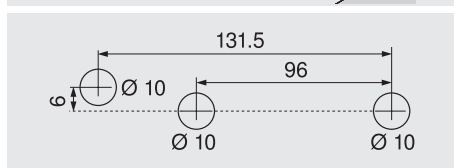




Skica bušenja rupa za donju stranicu

Ožičenje dolje

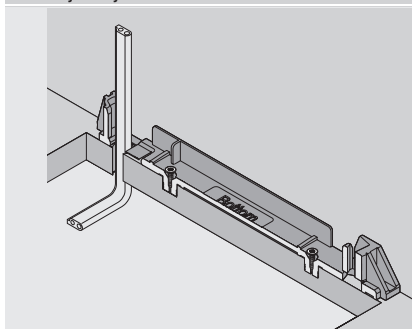


Alternativni izgled bušenja za PRO-CENTER i MINIPRESS

Ožičenje iza

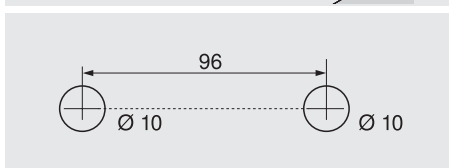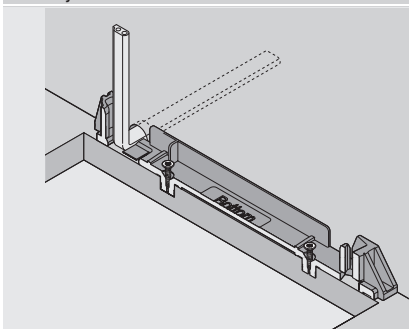


Obrada fronte – položaj odbojnika Blum

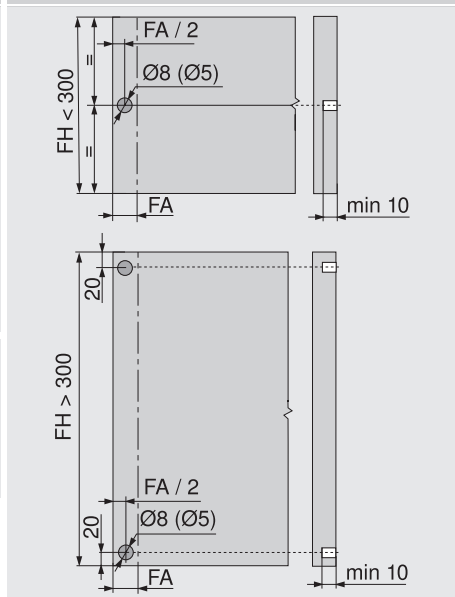

Odbojnik proizvođača Blum osigurava potrebni dio izvlačenja od 2 mm. Prilikom korištenja sustava LEGRABOX od 70 kg odn. vodilice TANDEMBOX od 65 kg montirajte 4 daljinska odbojnika tvrtke Blum. Za optimalnu sklopnu funkciju kod visine fronte FH > 300 mm upotrijebiti stabilizator fronte.


FA Otvaranje fronte
FH Visina fronte

Rezanje nosećeg profila

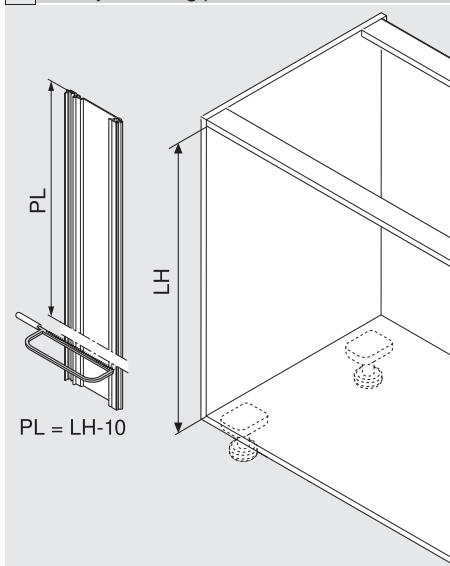


LH Svijetla visina korpusa
PL Duljina nosećeg profila

Položaj – pogonska jedinica

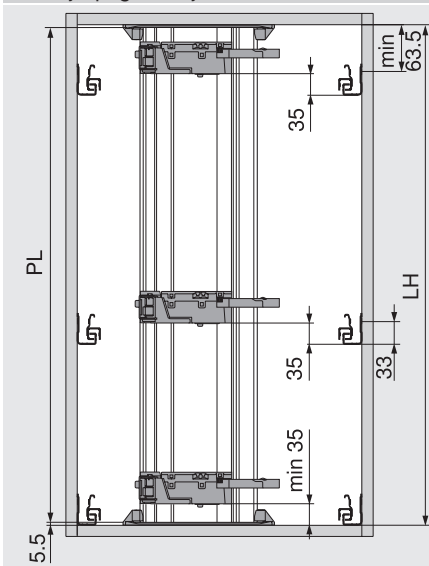

Sve visine stražnje stranice osim visine N
LH Svijetla visina korpusa
PL Duljina nosećeg profila
KB Širina korpusa

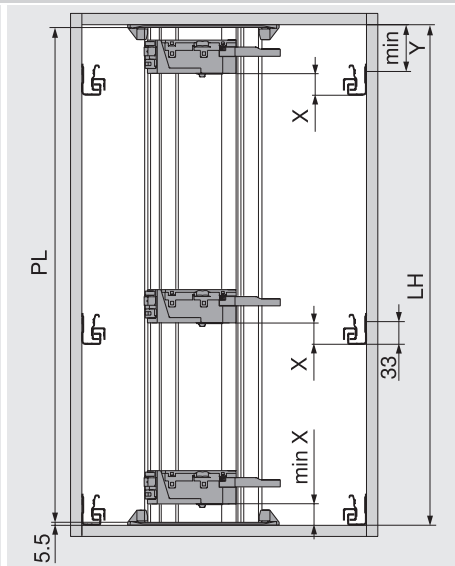

Visina stražnje stranice N

Širina korpusa KB	< 320 mm		> 320 mm	
Visina stražnje stranice N	X (mm)	Y (mm)	X (mm)	Y (mm)
Čelična stražnja stranica	27.5	48.5	27.5	48.5
Drvena stražnja stranica	35.5	55.5	27.5	48.5